



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Abdalla Bacha et al.

Serial No.: 10/797,941

Filing Date: **March 11, 2004**

Title: **Topology for Providing Clock
Signals to Multiple Circuit Units on
a Circuit Module**

§
§
§
§
§
§
§
§
§

Group Art Unit: **2816**

Examiner:

Attny. Docket No. **068758.0177**

Client Ref.: **IO040204PUS/pw**

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

CERTIFICATE OF MAILING VIA EXPRESS MAIL

PURSUANT TO 37 C.F.R. § 1.10, I HEREBY CERTIFY THAT I HAVE INFORMATION AND A REASONABLE BASIS FOR BELIEF THAT THIS CORRESPONDENCE WILL BE DEPOSITED WITH THE U.S. POSTAL SERVICE AS EXPRESS MAIL POST OFFICE TO ADDRESSEE, ON THE DATE BELOW, AND IS ADDRESSED TO:

MAIL STOP MISSING PARTS
COMMISSIONER FOR PATENTS
P.O. Box 1450
ALEXANDRIA, VA 22313-1450

EXPRESS MAIL LABEL: EV449865065US
DATE OF MAILING: JUNE 10, 2004

SUBMISSION OF PRIORITY DOCUMENT

Dear Sir:

We enclose herewith a certified copy of European patent application 03005541.2 which is the priority document for the above-referenced patent application.

Respectfully submitted,

BAKER BOTTS L.L.P. (023640)

Date: June 10, 2004

By:

Andreas H. Grubert
(Limited recognition 37 C.F.R. §10.9)
One Shell Plaza
910 Louisiana Street
Houston, Texas 77002-4995
Telephone: 713.229.1964
Facsimile: 713.229.7764
AGENT FOR APPLICANTS

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03005541.2

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 03005541.2
Demande no:

Anmeldetag:
Date of filing: 11.03.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Infineon Technologies AG
St.-Martin-Strasse 53
81669 München
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Topology for providing clock signals to multiple circuit units on a circuit module

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06F1/10

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

THIS PAGE BLANK (USPTO)

SCHOPPE, ZIMMERMANN, STÖCKELER & ZINKLER

PATENTANWÄLTE

European Patent Attorneys
European Trademark Attorneys

Patentanwälte · Postfach 246 · 82043 Pullach bei München

Infineon Technologies AG
St.-Martin-Straße 53

81669 Munich

Fritz Schoppe, Dipl.-Ing.
Tankred Zimmermann, Dipl.-Ing.
Ferdinand Stöckeler, Dipl.-Ing.
Franz Zinkler, Dipl.-Ing.

Telefon/Telephone 089/790445-0
Telefax/Facsimile 089/790 22 15
Telefax/Facsimile 089/74996977

e-mail: szsz_iplaw@t-online.de

**TOPOLOGY FOR PROVIDING CLOCK SIGNALS TO MULTIPLE CIRCUIT UNITS ON A
CIRCUIT MODULE**

11. März 2003

Description

Topology for providing clock signals to multiple circuit units on a circuit module

5

The present invention relates to a topology for providing clock signals to multiple circuit units on a circuit module and, in particular, to a topology which is appropriate to distribute clock signals to multiple memory chips located on a memory module.

10

An existing clock topology for providing a clock signal to multiple memory chips is shown in Fig. 4. The clock topology shown in Fig. 4 is implemented in existing DDR1 and DDR2 memory modules.

15

The existing memory module comprises a circuit board 10 provided with multiple edge connectors 12, one of them being a clock input 12a. The circuit board 10 can be inserted with the edge connectors into a mating plug connector provided on a motherboard such that the clock input 12a is connected to an external clock line so that an external clock signal can be received at the clock input 12a.

20

Multiple memory chips 20a to 20i is provided on the memory module circuit board 10. In addition, a phase locked loop unit 22 (PLL unit) in the form of a PLL chip is provided on the circuit board 10. A PLL clock input of the PLL 22 is connected to the clock input 12a. A PLL feedback loop 24 is connected between a PLL feedback loop output and a PLL feedback loop input of the PLL unit. Moreover, the PLL unit 22 comprises multiple PLL clock outputs each of which is connected to one or more memory chips via corresponding clock lines 26. The clock lines 26 are connected to respective memory chip clock inputs of the memory chips 20a to 20i.

30

35

The PLL unit 22 provides an internal clock signal via the clock lines 26 to the memory chips 20a to 20i based on the external clock signal received via the clock input 12a. In the ideal case, the PLL unit 22 provides the internal clock
5 signal with a zero phase shift to all memory chips 20a to 20i on the memory module which can be implemented as a DIMM module. Moreover, in the ideal case, the PLL unit 22 provides a zero delay from the PLL clock input to the respective clock inputs 28 of the memory chips, i.e. the DRAM
10 chips.

The topology shown in Fig. 1 has two main disadvantages. The first disadvantage is that all clock lines 26, i.e. all clock traces, must be matched with respect to length to the
15 longest one so that the delay provided by the line length can be compensated for by accordingly adapting the length of the PLL feedback loop 24. As a consequence it is necessary to provide the clock traces 26 adjacent to the PLL chip 22 with a "meander" or "serpentine" structure as it is
20 shown in Fig. 4. Such structures occupy much area of the printed circuit board 10. As a result, in most cases, clock signal routing requires a separate layer of a multi-layer printed circuit board. Moreover, matching the length of all clock traces to the longest one results in a performance
25 which is inferior when compared to a performance which could be obtained when making use of shorter clock traces.

The other main disadvantage of the topology of the clock traces shown in Fig. 1 is that most of the existing PLL
30 chips designed for memory applications have ten clock outputs, i.e. ten pairs of clock outputs in case of a differential signal transmission. In case of a memory module having 36 memory chips (and 1 or 2 memory registers), load is four DRAM chips per PLL clock output. This reduces the signal
35 quality with respect to the slew rate at high frequencies so that operation at frequencies of more than 166 MHz appears to be problematic. PLL chips having 18 to 20 pairs

of clock outputs could, in principle, solve this problem, but unfortunately such PLL chips do not exist on the market. Moreover, making using of PLLs with 18 to 20 pairs of clock outputs would increase the problem concerning the
5 trace lengths indicated above.

It is the object of the present invention to provide a circuit module having a topology for providing clock signals to multiple circuit units on the circuit module which permits increased clock frequencies when compared to prior art
10 solutions.

This object is achieved by a circuit module according to claim 1.

15

The present invention provides a circuit module comprising:

a circuit board;

20 multiple circuit units on the circuit board;

at least one clock input on the circuit board for receiving an external clock signal;

25 a first phase locked loop unit (PLL unit) on the circuit board for providing an internal clock signal based on the external clock signal to at least a first one of the circuit units;

30 a second PLL unit on the circuit board for providing an internal clock signal based on the external clock signal to at least a second one of the circuit units.

The present invention is based on the finding that the
35 above problems associated with prior art solutions can be solved or diminished by making use of more than one PLL unit per circuit module. By making use of multiple PLL

units, the line length between the PLL unit and the respective circuit units can be reduced. Moreover, the load of each PLL clock output can be reduced when making use of existing PLL chips having ten PLL clock outputs, for example.

5

In preferred embodiments of the invention, the circuit module is a memory module, a DIMM module, for example, and the circuit modules are memory chips, DRAM chips, for example.

- 10 According to the present invention, the PLL clock input of the plurality of PLL units can be connected to the same clock input on the memory module board or to different clock inputs on the memory module board. Each of the PLL units can have associated therewith an individual feedback
15 loop. Alternatively, a common feedback loop may be provided for two or more PLL units in that an internal clock signal is output onto the common feedback loop by one PLL unit, the feedback loop branches into multiple feedback loop branches and respective versions of the clock signal trans-
20 mitted via the respective branches of the feedback loop are received by two or more PLL units.

In the following, preferred embodiments of the invention are described making reference to the accompanying drawings. In the different drawings, elements corresponding to each other are provided with the same reference numerals wherein repeated separate description of the same elements is omitted.

- 25
30 Figures 1a and 1b show a first embodiment of a memory module according to the invention;

Figures 2a and 2b show a second embodiment of a memory module according to the invention;

35

Figures 3a and 3b show a third embodiment of a memory module according to the invention; and

Fig. 4 shows a prior art memory module.

As it is shown in Fig. 1a, a memory module according to the first embodiment of the invention comprises a module circuit board 50a. Multiple circuit chips 20a to 20i are provided on one surface of the module circuit board 50a. To indicate that a corresponding number of memory chips can also be placed on the backside of the module circuit board 50a, backside chips 52a to 52i are shown in Fig. 1a offset with respect to the memory chips 20a to 20i. The memory chips 20a to 20i and 52 can be conventional DRAM chips used in existing DDR1 and DDR2 memory topologies.

The memory module shown in Fig. 1a is in the form of a DIMM module and has multiple edge connectors 12. The module circuit board 50a is adapted to be inserted into a mating plug connector on a motherboard so that the edge connectors 12 make contact to mating counterparts of the plug connector. As indicated in Fig. 1a, the edge connectors include two board clock inputs 12a and 12b. The board clock inputs 12a and 12b are coupled to clock lines on the motherboard when the memory module is inserted into the mating plug connector of the motherboard.

Moreover, a first PLL unit 60 and a second PLL unit 62 are provided on the circuit board 50a. The PLL units 60 and 62 can be formed by existing PLL chips having ten clock output ports, for example. A PLL clock input of the first PLL unit 60 is connected to the clock input 12a, while a PLL clock input of the second PLL unit 62 is connected to the clock input 12b. A first feedback loop 64 is provided for the first PLL unit and a second feedback loop 66 is provided for the second PLL unit 62.

Respective PLL clock outputs of the first PLL unit 60 are connected to clock inputs 28 of the memory chips 20a, 20b, 20c and 20d via clock traces 70. In addition, each of the clock PLL outputs is connected to the clock inputs of two
5 memory chips, namely 20a and 52a, 20b and 52b, and so on. Respective clock outputs of the second PLL unit 62 are connected to clock inputs 28 of the memory chips 20e to 20i and 52e to 52i via associated clock traces 70.

10 The PLL units 60 and 62 receive an external clock signal via the clock inputs 12a and 12b and provide an internal clock signal based on the external clock signal to the memory chips. To be more specific, the first PLL unit 60 provides the internal clock signal to the memory chips 20a to
15 20d and 52a to 52d, while the second PLL unit 62 provides the internal clock signal to the memory chips 20e to 20i and 52e to 52i.

As can be seen in Fig. 1a, the trace lengths of the respective clock traces 70 can be reduced when compared to the
20 trace lengths of the prior art module shown in Fig. 4 by making use of two PLL units rather than a single PLL unit as in Fig. 1.

25 For the purposes of a clear representation, all clock traces are shown in Figures 1a, 2a, 3a and 4 like single ended traces, while, in preferred embodiments of the invention, same are formed by differential traces, as will become clear from the description of Figures 1b, 2b and 3b.

30 Fig. 1b shows a more detailed diagram of the memory module of Fig. 1a. In Fig. 1b, the clock inputs 12a and 12b are shown as differential clock inputs. The clock inputs 12a and 12b are connected to the first PLL unit 60 and the second PLL unit 62, respectively, via respective first transmission lines TL1. In order to prevent reflections at the
35 input of the respective PLL unit, respective termination

resistors R1 are connected between the differential traces of the transmission line connecting the clock input 12a to the first PLL unit 60 and the clock input 12b to the second PLL unit 62. The termination resistors are provided adjacent the respective PLL unit.

Each of the PLL units 60 and 62 comprises a clock input CLKin, multiple clock outputs CLKout, a feedback input FBin and a feedback output FBout. The respective PLL clock input CLKin is connected to the transmission lines TL1 and TL2 respectively, to receive an external clock signal applied to the clock input 12a and 12b, respectively.

Each PLL clock output CLKout is connected to two memory chips via respective second transmission lines TL2 and third transmission lines TL3. Again, termination resistors R1 are provided in order to prevent reflections. In a practical implementation, the length of the second transmission lines TL2 is much longer than the length of the third transmission lines TL3. Thus, when considering reflections, the lengths of the third transmission lines TL3 can be neglected and the respective termination resistor R1 can be provided preceding a respective branching point 80 at which the transmission line TL2 splits up into two separate lines TL3 each of which is connected to a respective memory chip.

For the purposes of a clear representation, Fig. 1b only shows the connection of one PLL clock output to both DRAM chips 20a and 52a with respect to the PLL unit 60 and the connection of one PLL clock output to the DRAM chips 20a and 52e with respect to the PLL unit 62. It is clear for a man skilled in the art, that each of the PLL units comprises a number of PLL clock outputs appropriate to provide a connection to all memory chips of the memory module, wherein each clock output is connected to two memory chips in the manner described above with respect to memory chips 20a, 52a, 20e and 52e.

As it is shown in Fig. 1b, the first feedback loop 64 is connected between the feedback loop output FBout and the feedback loop input FBin of the PLL units 60, while the
5 second feedback loop 66 is connected between the feedback loop output and the feedback loop input of the second PLL unit 62. The feedback loops 64 and 66 are designed to show a behavior between the feedback loop output and the feedback loop input of the respective PLL unit similar to the
10 behavior of the respective clock traces between the PLL clock outputs of the PLL units and the clock inputs of the memory chips. To this end, the feedback loops are designed with a structure similar to that of the clock traces and include a respective fourth transmission line TL4 and a re-
15 spective termination resistor R1. The fourth transmission lines can have the same line length as the line length of the clock trace between the PLL unit and the memory chips. In order to take into account the fact that two memory chips are connected to each PLL clock output, it may be
20 necessary to provide an additional capacitor C in the feedback loops. This capacitor C represents a "virtual" second load of the respective feedback loop in addition to the feedback loop input of the respective PLL unit so that the load conditions of the clock traces and the feedback loops
25 are equalized and the feedback loop shows a behavior similar to that of the clock traces.

As it is known in the art, the PLL units 60 and 62 output the internal clock signal to the feedback loops 64 and 66,
30 respectively via the feedback loop output FBout. Thus, one of the normal PLL clock outputs may be used as the feedback loop output. The internal clock signal transmitted over the feedback loop is received at the feedback loop input FBin. The PLL unit controls the frequency of the internal clock
35 signal based on a comparison of the external clock signal applied to the PLL clock input CLKin and the version of the internal clock signal received at the feedback loop input

FBin. To be more specific, the phase of external clock signal applied to the PLL clock input and the phase of the internal clock signal transmitted over the feedback loop are compared and the internal clock signal output from the PLL clock output is controlled such that, in the ideal case, phase shift to all memory chips on the memory module is zero and delay from the PLL clock input to the memory chip clock inputs is, in the ideal case, zero.

According to the embodiment shown in Figures 1a and 1b of two independent PLL units are used. To be more specific, each PLL unit has its own clock input 12a and 12b, respectively, and its own feedback loop 64 and 66, respectively, on the circuit board. This solution has the advantage of a reduced length of nets between the PLL units and the memory chips and the advantage of a reduced area occupied by such nets. However, in the embodiment shown in Fig. 1a, two separate clock inputs are provided on the circuit board. Alternatively, one single clock input could be provided on the circuit board as will be described later herein making reference to Fig. 3b. Moreover, according to the above embodiment, each individual PLL chip may have a phase error and, in the worst case, the phase error between the right and the left part of the memory module will be doubled.

In Figures 2a and 2b, a further embodiment of the present invention is shown in the case of which two PLL units 60 and 62 share one feedback loop. Moreover, both PLL units 60 and 62 are connected to the same clock input 12a on the module circuit board 50b.

As can be seen from Fig. 2b, the PLL units 60 and 62 are connected to the same board clock input 12a via a first portion TL1a of the first transmission line and second portions TL1b of the first transmission line. In this situation, a termination resistor R1 is connected between the first portion TL1a and a branching point 92 at which the

first portion TL1a branches into the two second portions TL1b. The shared feedback loop 90 comprises a common feedback loop portion 90a, a branching point 94, a first feedback loop branch 90b and a second feedback loop branch 90c.

5 The common feedback loop portion 90a is connected to the feedback loop output FBout of the PLL unit 60 and comprises a transmission line TL5 and a termination resistor R1. At the branching point, the common portion 90a branches into the first feedback loop branch 90b which is connected to
10 the feedback loop input FBin of the PLL unit 60, and into the second feedback loop branch 90c, which is connected to the feedback loop input FBin of the PLL unit 62. Each of the feedback loop branches comprises a transmission line TL6.

15 As it is indicated by an indication arrow 100, in the particular embodiment shown, the number of feedback loop branches into which the common feedback loop portion branches corresponds to the number of memory chips connected to each clock output CLKout. This may be helpful in
20 designing the load of the FBout to be similar to the load of CLKout.

The embodiment shown in Figures 2a and 2b removes a difference in static phase offset between the PLL units 60 and
25 62. To this end, the PLL units 60 and 62 must be placed close to each other on the circuit board 50b in order to keep a net structure of the feedback loop similar to the clock traces between the PLL units and the memory chips.
30 However, by placing the PLL chips close to each other, the line lengths required are increased when compared to the embodiment shown in Figures 1a and 1b. By making use of a shared feedback loop, the PLL unit 62 does not need a separate feedback loop output, so that that output indicated in
35 Fig. 2b as a feedback loop output could be used as a normal clock output.

A further embodiment of the present invention making use of a shared feedback loop and providing for reduced clock trace lengths is shown in Figures 3a and 3b. As in Fig. 1, the PLL units are placed in an unsymmetrical manner spaced
5 apart from each other between the circuit chips 20a to 20e. The clock inputs of the PLL units 60 and 62 are connected to the same board clock input 12a. Both PLL units 60 and 62 make use of a shared feedback loop 102, wherein, due to the spatial distance between the PLL units, the structure of
10 the PLL loop is different from the structure of the clock traces between the PLL units and the memory chips. An indication for this is given in Fig. 3a by line 104.

As can be seen in Fig. 3b, the clock input of the PLL units
15 60 and 62 are connected to the common circuit board clock input 12a via a first portion of a first transmission line TL1a and respective second portions of the first transmission line TL1b. A termination resistor is connected between the differential lines of the first portion TL1a preceding
20 a branching point 92. The lengths of the transmission lines TL1a and TL1b depend on the positions of the PLL units on the module circuit board.

The shared feedback loop 102 comprises a common feedback
25 loop portion 102a, a branching point 106, a first feedback loop branch 102b and a second feedback loop branch 102c. The first feedback loop 102b and the second feedback loop branch 102c are similar to each other. The connection of the elements of Fig. 3b is similar to that described with
30 respect to Fig. 2b. However, in case of Fig. 3b, the feedback loops associated to each of the PLL units have a different structure when compared to the structure of the traces between the PLL units and the memory chips. The feedback loop associated to the PLL unit 60 is the feedback
35 loop comprising the common portion 102a and the first branch 102b. The feedback loop associated to the PLL unit 62 is the feedback loop comprising the common portion 102

and the second branch 102c. Thus, in the embodiment shown in Fig. 3, additional elements have to be connected into the feedback loop in order to obtain an electrical behavior similar to that of the clock traces between the PLL units and the memory chips. In the embodiment shown in Fig. 3b, this is achieved by connecting matching capacitors C_{M1} and C_{M2} between the differential lines of the feedback loops parallel to termination resistors $R1$. In this embodiment, the position of the PLL units is optimized for a shortest possible PLL to DRAM routing.

Also not explicitly stated above, it is clear that the length of the respective clock traces between the PLL units and the different memory chips has to be adapted to the length of the longest clock trace for each embodiment. Moreover, it is clear for a man of ordinary skill that termination resistors could be positioned at other or additional positions in order to achieve the required performance with respect to preventing reflections.

List of reference numbers

	10	Circuit board
	12	Edge connectors
5	12a, 12b	Clock inputs
	20a-20i	Memory chips
	22	PLL unit
	24	PLL feedback loop
	26	Clock lines
10	28	Memory chip clock input
	50a, 50b, 50c	Module circuit boards
	52a-52i	Backside chips
	60	First PLL unit
	62	Second PLL unit
15	64	First feedback loop
	66	Second feedback loop
	70	Clock traces
	TL1	First transmission line
	R1	Termination resistor
20	CLKin	PLL Clock input
	CLKout	PLL Clock output
	FBin	Feedback loop input
	FBout	Feedback loop output
	TL2	Second transmission line
25	TL3	Third transmission line
	TL4	Fourth transmission line
	80	Branching point
	C	Capacitor
	90	Feedback loop
30	TL1a	First portion of first transmission line
	TL1b	Second portions of first transmission line
	92	Branching point
	90a	Common portion of feedback loop

	90b	First feedback loop branch
	90c	Second feedback loop branch
	94	Branching point
	TL5, TL6	Transmission lines
5	100	Indication arrow
	102	Shared feedback loop
	104	Line
	102a	Common feedback loop portion
	102b	First feedback loop branch
10	102c	Second feedback loop branch
	106	Branching point
	C_{M1} , C_{M2}	Matching capacitors

THIS PAGE BLANK (USPTO)

Claims

1. A circuit module comprising:

5 a circuit board (50a; 50b; 50c);

multiple circuit units (20a to 20e, 52a to 52e) on the circuit board;

10 at least one clock input (12a, 12b) on the circuit board for receiving an external clock signal;

a first phase locked loop (PLL) unit (60) on the circuit board for providing an internal clock signal based on the
15 external clock signal to at least a first one of the circuit units; and

a second PLL unit (62) on the circuit board for providing an internal clock signal based on the external clock signal
20 to at least a second one of the circuit units.

2. The circuit module according to claim 1, wherein the circuit module is a memory module and wherein the circuit units are memory chips.

25

3. The circuit module according to claim 1 or 2, wherein each of the PLL units (60, 62) has a PLL clock input (CLKin) and wherein the PLL clock inputs of the PLL units are connected to different clock inputs (12a, 12b) on the
30 circuit board (50a).

4. The circuit module according to claim 1 or 2, wherein each of the PLL units (60, 62) has a PLL clock input (CLKin) and wherein the PLL clock inputs of the PLL units
35 are connected to the same clock input (12a) on the circuit board (50b, 50c).

5. The circuit module according to one of claims 1 to 4, wherein each of the PLL units (60, 62) has associated therewith a feedback loop (64, 66; 90; 102) designed to show a behavior similar to the behavior of a clock signal path between the PLL units (60, 62) and one of the circuit units, wherein the frequency of the internal clock signal is controlled based on a comparison of the external clock signal received at a PLL clock input (CLKin) of the PLL units (60, 62) and a version of the internal clock signal transmitted over the feedback loop.

6. The circuit module according to claim 5, wherein both PLL units (60, 62) share a common feedback loop (90; 102) in that a common portion (90a; 102a) of the feedback loop is connected to a feedback loop output (Fbout) of the first PLL unit (60) and that the common portion (90a; 102a) branches into two feedback loop branches (90b, 90c; 102b, 102c), wherein one of the feedback loop branches (90b; 102b) is connected to a feedback loop input (Fbin) of the first PLL unit (60) and the other of the feedback loop branches (90c; 102c) is connected to a feedback loop input (Fbin) of the second PLL unit (62).

7. The circuit board unit according to claim 6, wherein the common portion (90a; 102a) branches into multiple feedback loop branches and wherein the number of the plurality of feedback loop branches corresponds to a number of circuit units connected to one PLL clock output (CLKout) of the PLL unit (60, 62).

11. März 2003

Summary

Topology for providing clock signals to multiple circuit units on a circuit module

- 5 A circuit module has a circuit board (50a), multiple circuit units (20a to 52i) on the circuit board (50a) and at least one clock input (12a) on the circuit board (50a) for receiving an external clock signal. The circuit module has
- 10 a first PLL unit (60) on the circuit board (50a) for providing an internal clock signal based on the external clock signal to at least a first one of the circuit units. In addition, the circuit module has a second PLL unit (62) on the circuit board (50a) for providing an internal clock
- 15 signal based on the external clock signal to at least a second one of the circuit units.

THIS PAGE BLANK (USPTO)

11. März 2003

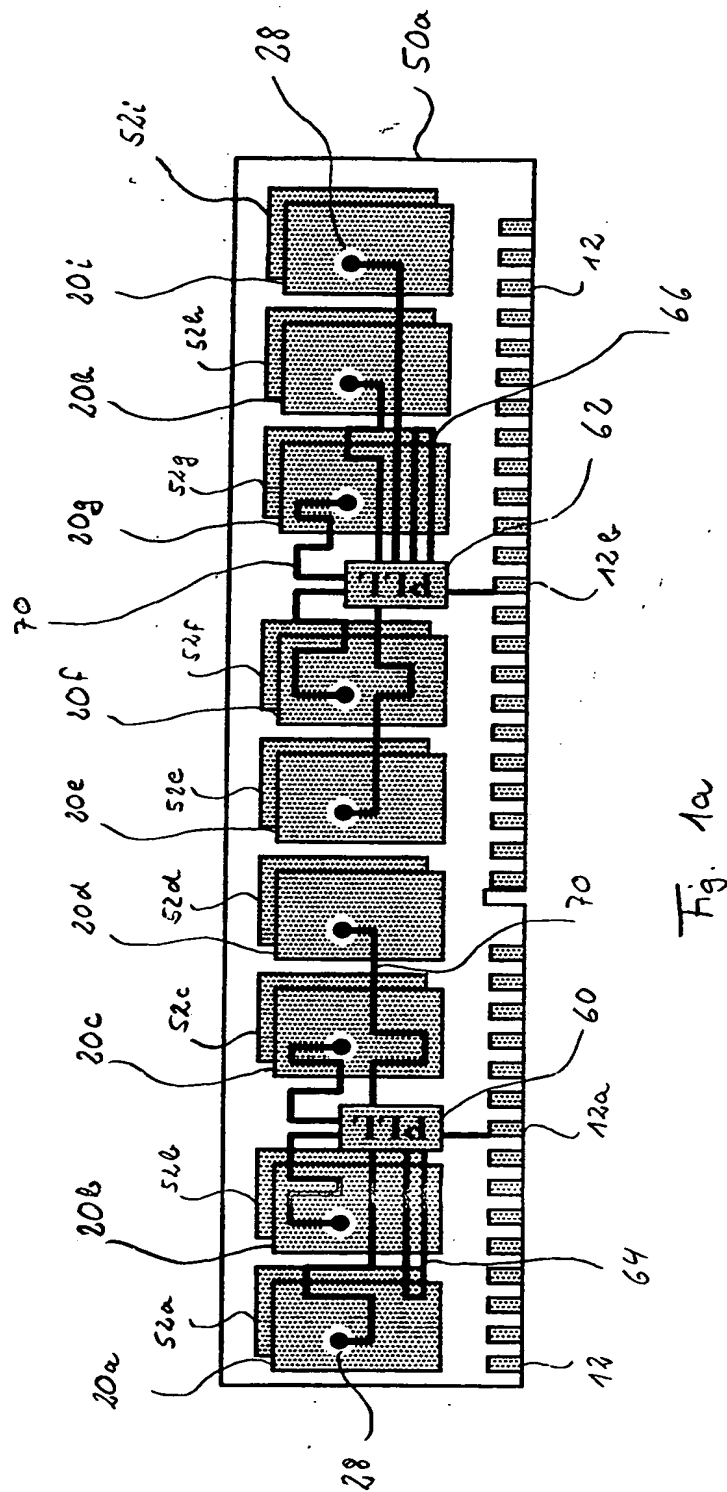


Fig. 1a

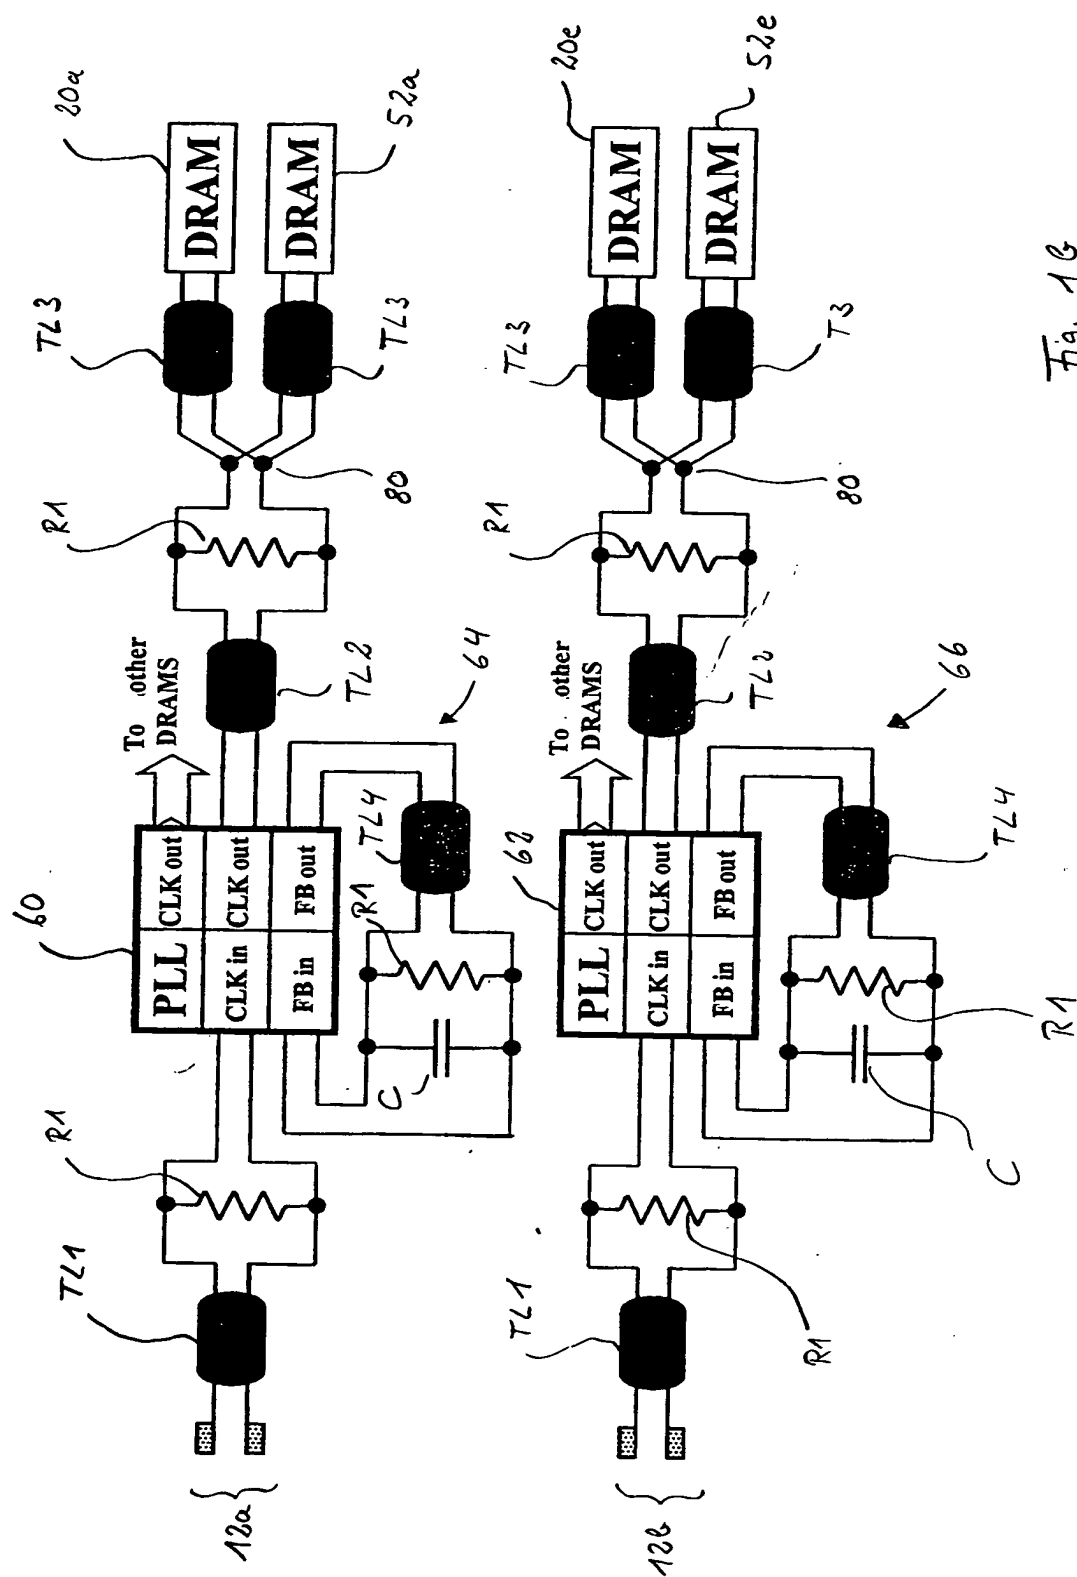


Fig. 10



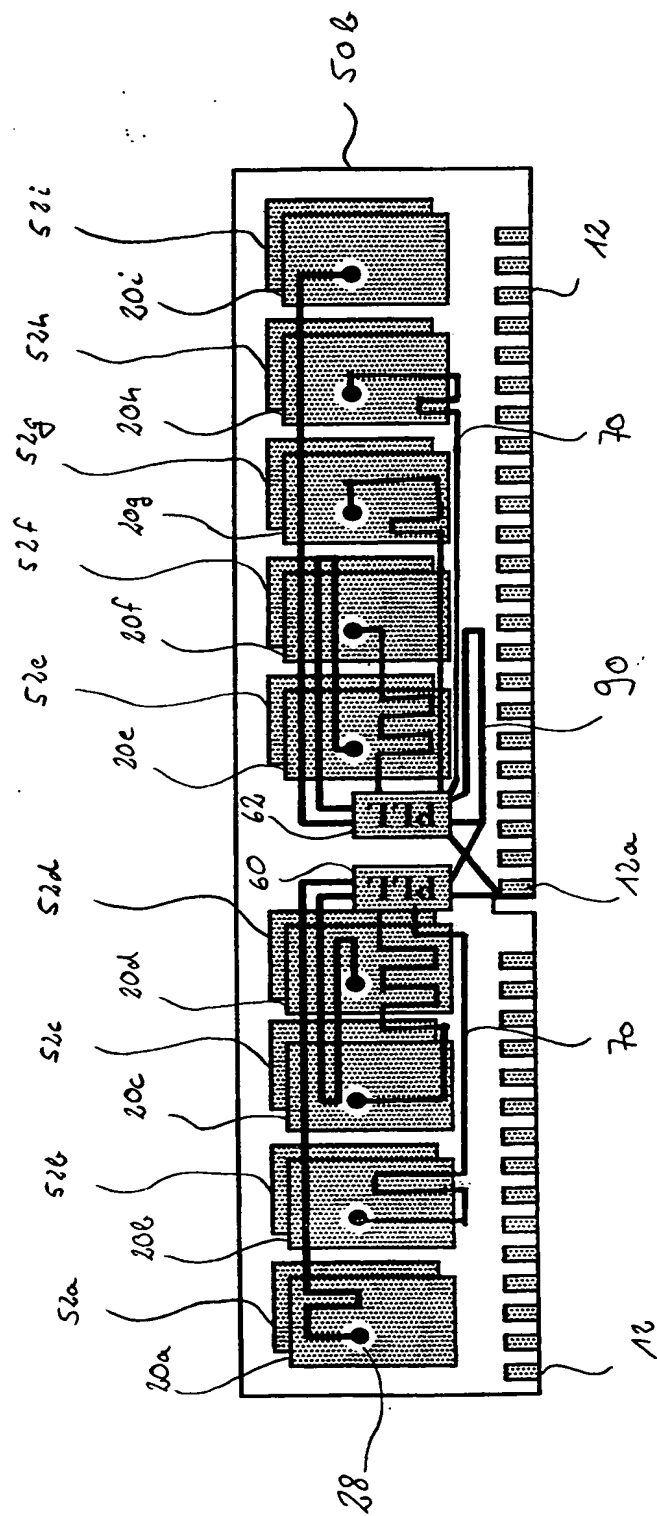


Fig. 2a

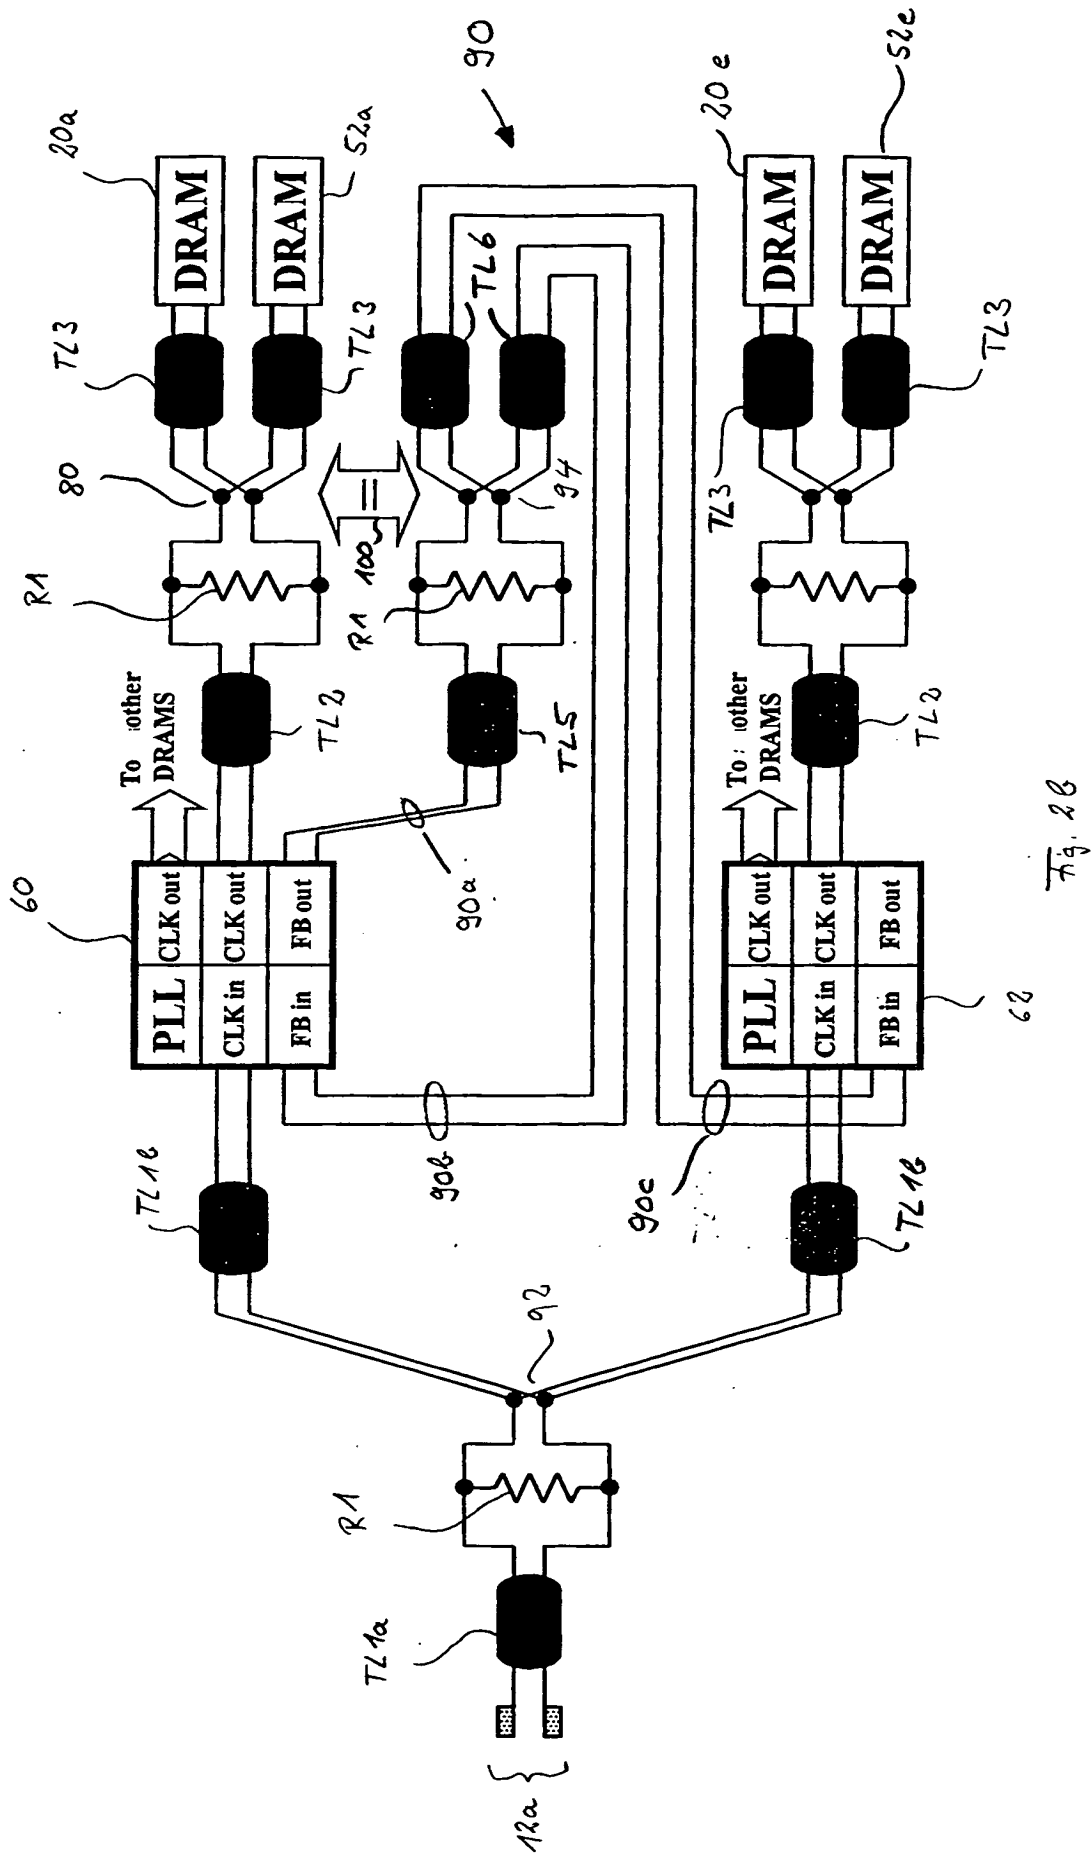

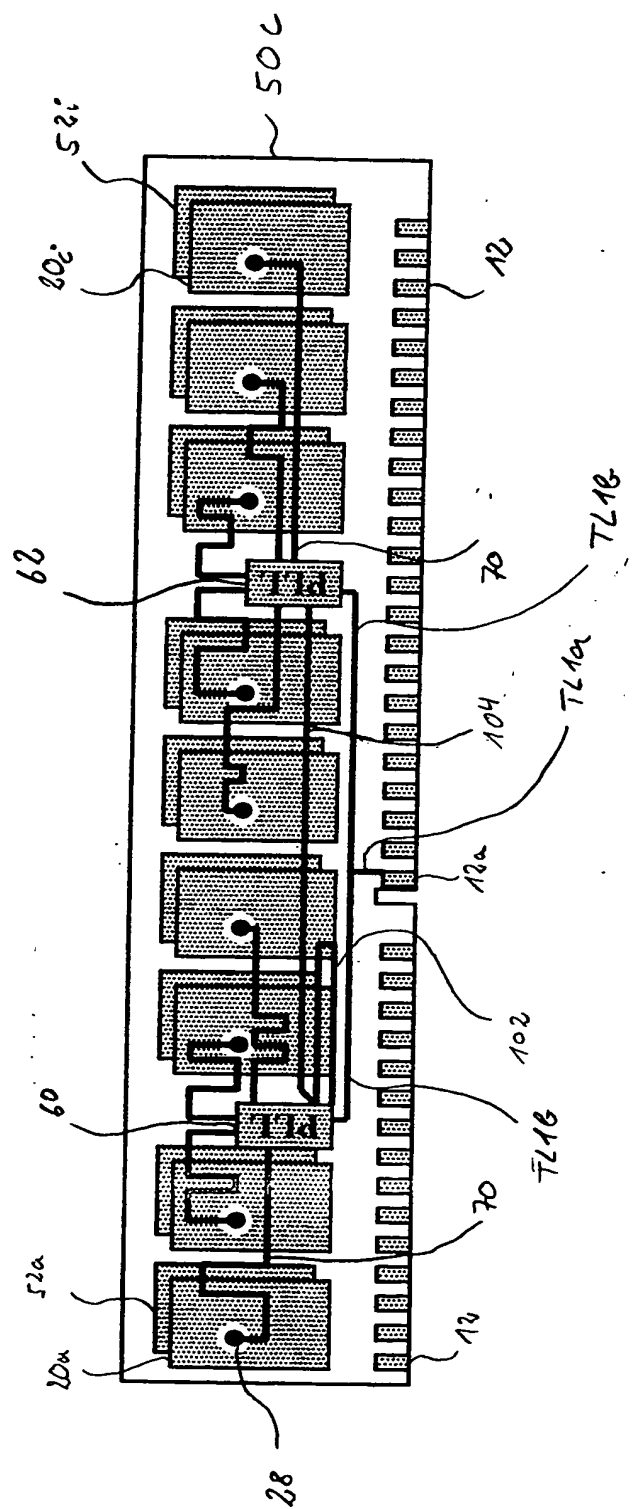

nig. 3a

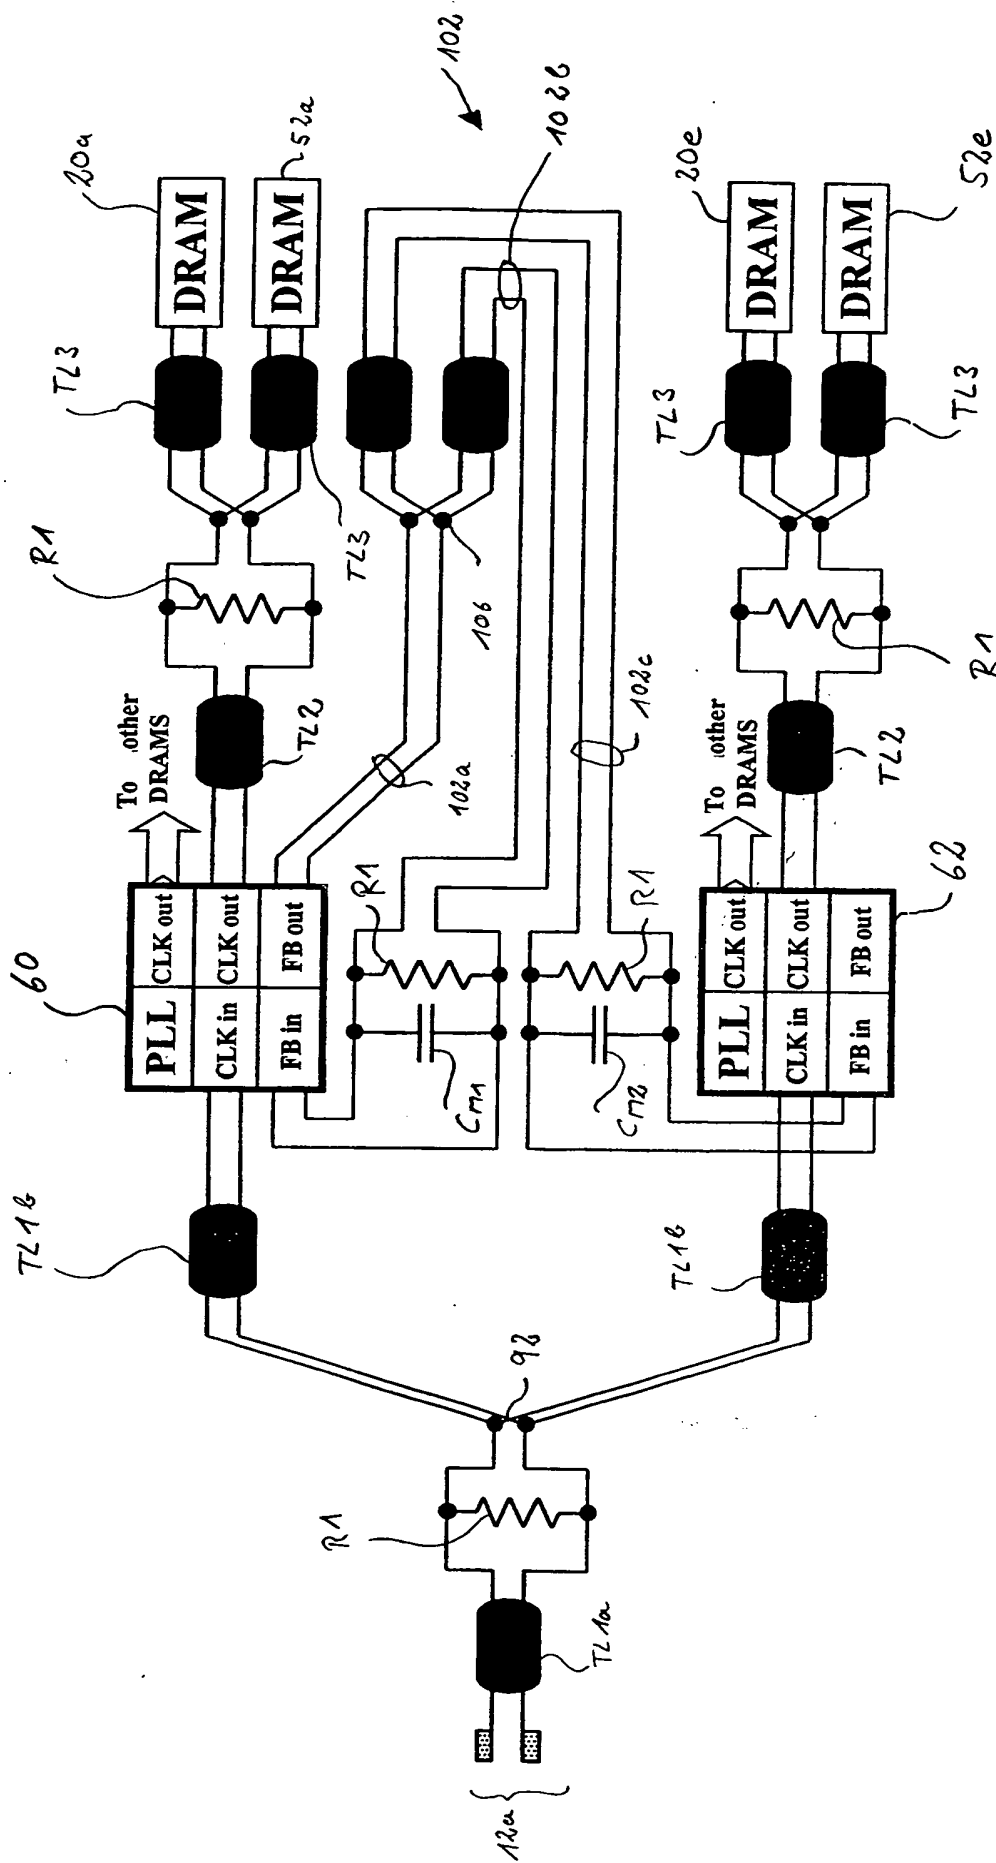


Fig. 3b

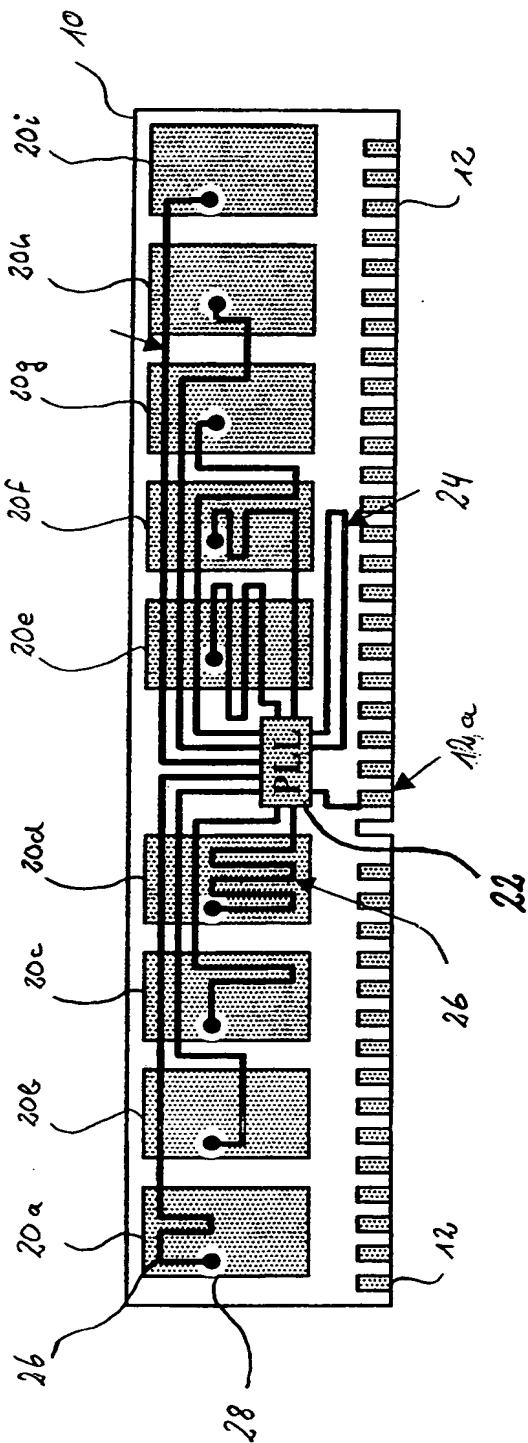


Fig. 4 (Prior Art)

THIS PAGE BLANK (USPTO)